


## Radial Pneus 9 - 9H and 10

The RP 9 an 10 presses allow to retread tyres for agricultural purpose, aircraft and OTR.

The presses can be manufactured tubeless and with curing tube.

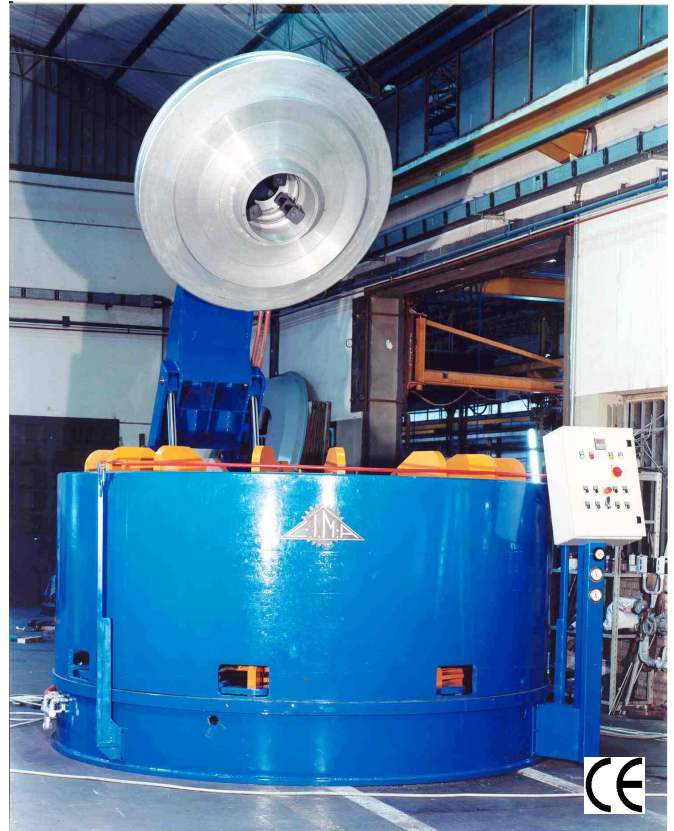

### Technical features\*

	RP 9	RP 9 H	RP 10
Ø DIAMETER OF THE CAVITY mm	2150	2150	2500
HEIGHT OF THE CAVITY mm	750/850	800/1000	800/1100
MAX TYRE O.D. mm	2080	2080	2420
MAX TYRE C.S. mm	820	970	1050
WEIGHT Kg	25000	29000	32000
AIR CONSUMPTION Nlt/h	7500	8000	10000
STEAM CONSUMPTION Kg/h	150	180	230
MAX INFLAT. PRESSURE Bar**	18	18	14
ENGINE POWER HP	10	10	12,5
WIDTH mm	3500	3500	3900
LENGTH mm	4700	4700	5300
CLOSED HEIGHT mm	2500	2650	2800
OPEN HEIGHT mm	5000	5150	5500
TYRES SIZES	From 23.5 R 25 to 29.5 R 29	From 23.5 R 25 to 35/60 R 33	From 24.00 R 35 to 37/25 R 35

\*\*standard configuration. Higher pressures on request

\*Dimensions and specification shown are not binding and could be changed without notice by the manufacturer