

**EXTRUDER builder for tread
rubber application**



**76 mm smooth extruder;
L/D ratio: 12/1; rated
speed 75 rpm**


**Extruder a.c. motor 18Kw
400/460v 50/60Hz 3ph with
inverter;**

Automatic application of tread rubber

Data storage

- Azimut (drum support rotation) axis with brushless motor and drive
- Radius (drum support forward/reverse movement) axis with brushless motor and drive
- One zone temperature control with water pump, electric heater, water/air exchanger with fan, water tank
- 10" touch screen display for operator interface
- Plug and play
- Drives, brushless motors and electric equipments made by Schneider Electric

www.cimaimpanti.com

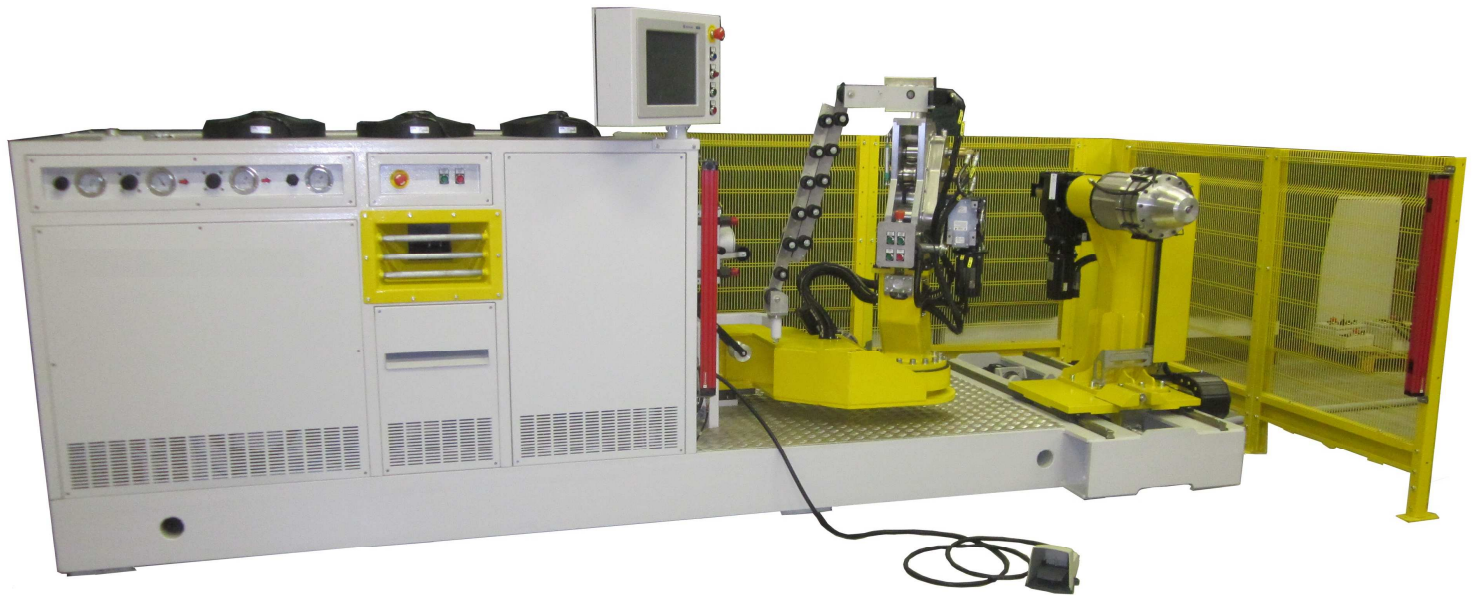

Mod. **CI-MASTER 24**



Calander head

Automatic application of tread rubber

Data storage

**Exclusive Touch Screen PC with Lan
Connection and Ethernet Connection**

**Laser circumference reader and
buffed shape acquisition;**

**45kW DC motor and driver for
extrusion speed adjustment;**

80 mm pin type extruder L/D 1:12

**The extruder is capable of processing Passenger, 4WD,
Light Truck and Truck tyres, using suitable expandable
rims**